



Laiv[®]

In The Moment

LUXURY VINYL FLOORING

2mm

LVF

WOOD SERIES



Environmental
Friendly



Fire
retardant



Super strong
wear resistance



Easy
installation



Super
anti-slip



Silent noise
reduction



Good thermal
conductivity



D-039

BROKEN WHITE




D-038

LIGHT GREY



D-041

NEW WALNUT

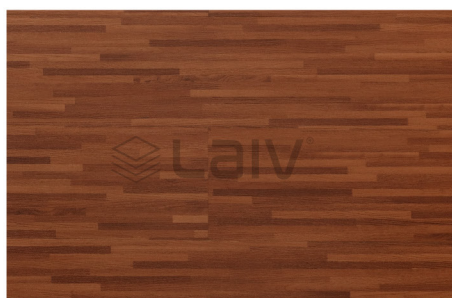

D-045

MIRAGE MAPLE



D-046

CROSS MAPLE



D-034

NATURAL OAK



D-040

VICENZA OAK




D-033

SIERRA BROWN




D-036

SAND OAK

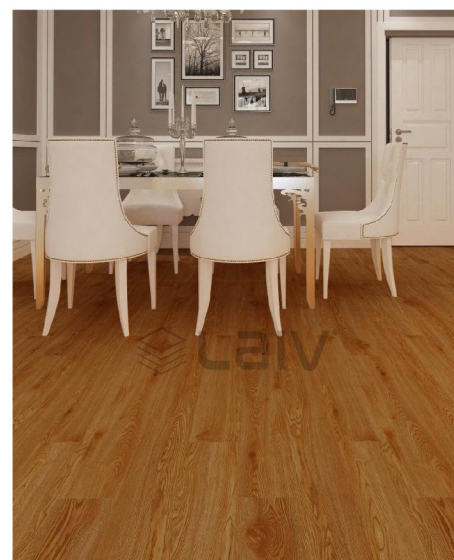

D-037

ORIGINAL CHESNUT

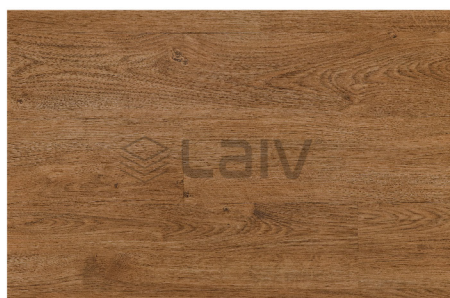

D-035

BROWN WALNUT




D-032

ACOUSTIC OAK




D-042

RICH WALNUT

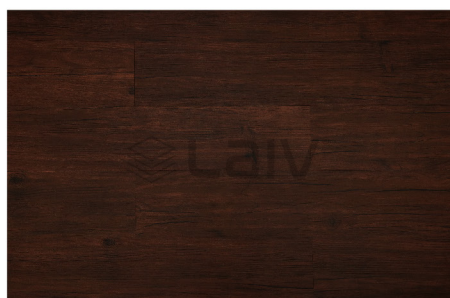

D-043


NOBLE ELM

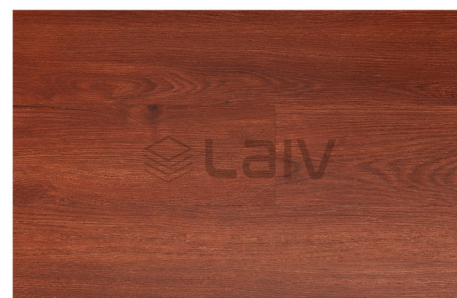

D-044

RED SAKAI

Product Structure

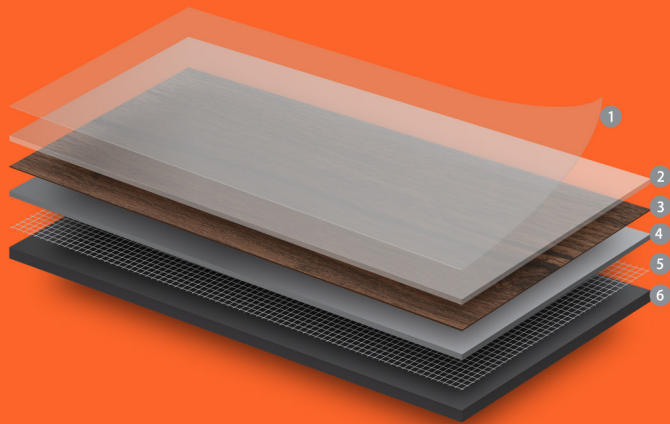

1. PUR Paintcoat
2. PVC Wearlayer
3. Printing Layer
4. Middle Layer
5. Glass Fiber Layer
6. Backing Layer



Technical Parameter

Product certification			
Ground material type	ISO 10582		LUXURY VINYL FLOORING
Limit harmful substances	ISO 1856-2001		
Product specification			
Fire rating	ISO 24346(EN 428)	mm	2.0
Toxic testing	ISO 24340(EN 429)	mm	0.15
Electrical resistance	-	mm	152.4mm x 914.4mm
Product specification			
Abrasion group	GB/T 4085-2015		T
Residual indentation	ISO 24343-1 (EN433)	mm	≤0.1
Furniture with low	EN 424		suitable
Castor wheel test	ISO 4918 (EN425)		suitable
Heat the warping	ISO 23999 (EN434)	mm	≤2
Rate of change of longitudinal and longitudinal dimensions	ISO 24346(EN 434)		≤0.25%
Color fastness to light	ISO 105-B022	%	6
TVOC release after 28 days	ISO 16000		< 100 g/m³
Impact resistance	GB/T 4085-2015		suitable
Prevent slippery level	DIN 51130		R9
Fire rating	GB 8624-2012		B1